

## Applied signal processing

### Lab 3, May-2007

In this lab, we will implement an echo cancellation filter.

Long-distance telephone systems employ four copper wires between two central offices. In each central office, a *hybrid* connects the four wire circuit to the two-wire circuit used between the central office and the subscriber (figure 1). Normally the hybrid should be balanced so that no echo goes back.

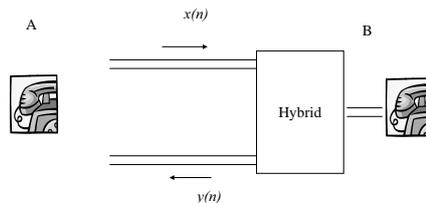


Figure 1: Telephone system

However, due to imperfect balancing of the hybrid, there is always a echo from the insignal  $x(n)$  to the outsignal  $y(n)$  back the talker. If the delay of this echo is more than 100 ms, it starts to disturb the communication. The delay is nowadays often increased due to digital techniques, introducing buffering of data.

One way of canceling the echo is to insert a adaptive FIR-filter at the hybrid end. This adaptive filter should estimate the transfer function  $H(z)$  of the hybrid that causes the echo (figure 2). Using this filter, a estimate of the echo can be subtracted from the signal leaving the hybrid.

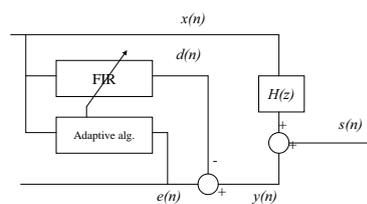


Figure 2: Echo cancellation system

The crucial element in adaptive filters are the adaptive algorithm. Least Mean Square (LMS) algorithms are often used in this context.

In this exercise we will use Stochastic Iteration Algorithm given by

$$h(n+1) = h(n) + \mu e(n)X(n) \quad (1)$$

where  $h(n)$  a vector describing the estimate of the filter coefficients at iteration  $n$ ,  $e(n)$  is the estimation

error at time  $n$ ,  $X(n)$  is the vector of input signals, and  $\mu$  is the adaptation step. This corresponds to what is given in the lectures.

The error  $e(n)$  is given as the difference

$$e(n) = y(n) - d(n) \tag{2}$$

The estimate  $d(n)$  of the output signal  $y(n)$  is given by the FIR-filter

$$\begin{aligned} d(n) &= X^T h(n) \\ &= \sum_{k=0}^{M-1} h(k)x(n-k) \end{aligned} \tag{3}$$

One problem with this algorithm is that it will not adapt well to input signals with large variation in signal power, as the adaptation step  $\mu$  is fixed. One way is to make the adaptation step variable. The following can be used

$$h(n+1) = h(n) + \frac{\mu^*}{\delta + \sigma^2} e(n)X(n) \tag{4}$$

where  $u^*$  is a dimensionless step,  $\sigma^2$  is the total input power, while  $\delta$  is a small constant to prevent small values of input power to result in large coefficient correction terms. As the total input power is unavailable  $\sigma^2$  is taken as the input signal windowed over a certain period. Here the squared norm of the input vector can be used,  $|X(n)|^2$ . The algorithm will be convergent if the following condition is satisfied:

$$0 \leq \mu^* \leq 2 \tag{5}$$

In this exercise, we will use a system like in figure 3. The task is to implement the adaptive filter in the DSP implement the adaptive filter so that echos are removed.

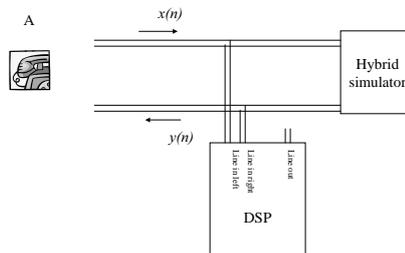


Figure 3: Connection to DSP-card